



SUBMITTAL DATA


TOP VIEW

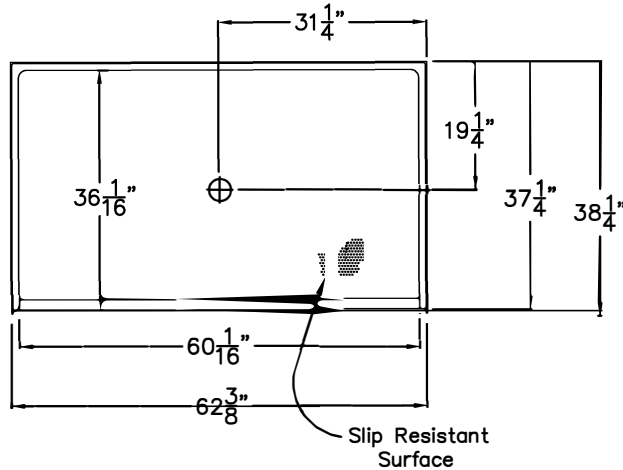

SIDE VIEW

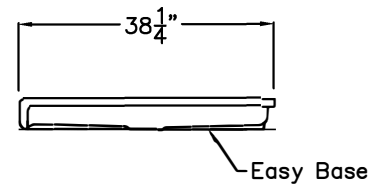

FRONT VIEW

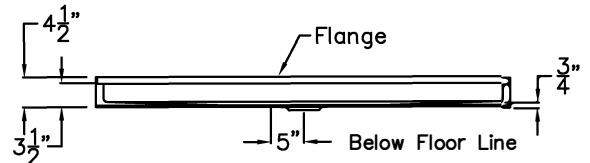


Barrier Free Shower Pan

The shower pan shall be RBS 6238 BF.75 COL Pan center drain. Finished surface shall be of a sanitary-grade polyester Gelcoat exhibiting a minimal thickness of 15 dry mils, and a finished cured Barcol hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of molded reinforced fiberglass with a minimum fiberglass content. The unit shall have outside dimensions of 62 3/8" x 38 1/4" x 4 1/2". Shower pan shall meet ANSI Z124.2, Home Innovation Research Lab, UPC, CSA B45.5, and shall meet the requirements of the Southern Building Code.

The enclosure shall be equipped with the following installed accessories:

- 1) Low entry 3/4" Change Of Level threshold,
- 2) Factory installed Easy Base self sustaining bottom.
- 3) Slip Resistant Surface on floor in compliance with ASTM F-462.

Detail of 3/4" Threshold

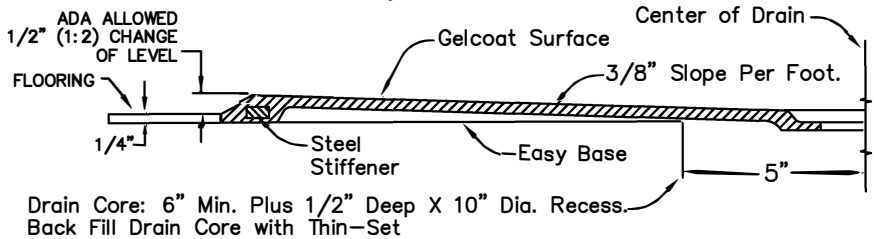

DUE TO THE NATURE OF THE MATERIALS INVOLVED UNIT DIMENSIONS MAY VARY ± 1/2 INCH

| | |
|-------------------------|--|
| Job Name: | Health at Home, Inc. |
| Approved By Print Name: | Drawing#: RBS 6238 BF .75 COL PAN Easy Base |
| Approved By Signature: | Date Approved: |
| Rep.: | Wholesaler: |
| | Quote No. |